


■ Fluorine rubber cord specification (fluorine rubber rope)



Compound&code	C/S(mm)	C/S tolerance (mm)	Length (M)
XT-FKM78-0128	1.28	0.10	100
XT-FKM78-0178	1.78	0.10	100
XT-FKM78-0200	2.00	0.10	100
XT-FKM78-0240	2.40	0.10	100
XT-FKM78-0262	2.62	0.10	100
XT-FKM78-0300	3.00	0.12	100
XT-FKM78-0350	3.50	0.12	100
XT-FKM78-0400	4.00	0.15	100
XT-FKM78-0450	4.50	0.15	100
XT-FKM78-0500	5.00	0.18	100
XT-FKM78-0534	5.34	0.18	100
XT-FKM78-0550	5.50	0.18	100
XT-FKM78-0570	5.70	0.18	100
XT-FKM78-0600	6.00	0.18	50
XT-FKM78-0635	6.35	0.18	50
XT-FKM78-0650	6.50	0.25	50
XT-FKM78-0700	7.00	0.25	50
XT-FKM78-0750	7.50	0.25	50
XT-FKM78-0800	8.00	0.25	50
XT-FKM78-0840	8.40	0.25	50
XT-FKM78-0900	9.00	0.25	50
XT-FKM78-0950	9.50	0.25	50
XT-FKM78-1000	10.0	0.25	50
XT-FKM78-1100	11.0	0.30	50
XT-FKM78-1200	12.0	0.30	50
XT-FKM78-1300	13.0	0.30	50
XT-FKM78-1400	14.0	0.30	50
XT-FKM78-1500	15.0	0.30	50
XT-FKM78-1600	16.0	0.35	30
XT-FKM78-1700	17.0	0.35	30
XT-FKM78-1800	18.0	0.35	30
XT-FKM78-1900	19.0	0.35	30
XT-FKM78-2000	20.0	0.35	30
XT-FKM78-2200	22.0	0.40	30
XT-FKM78-2500	25.0	0.60	30

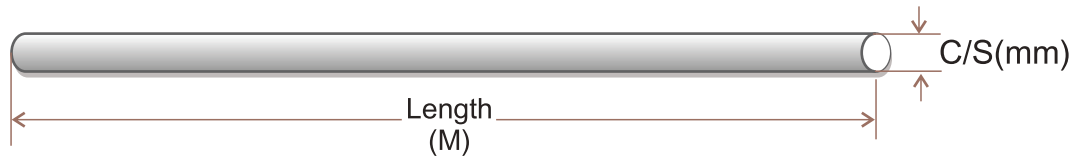

Note: Special specifications / colors can be customized